


SofPull® Automated Towel Dispenser

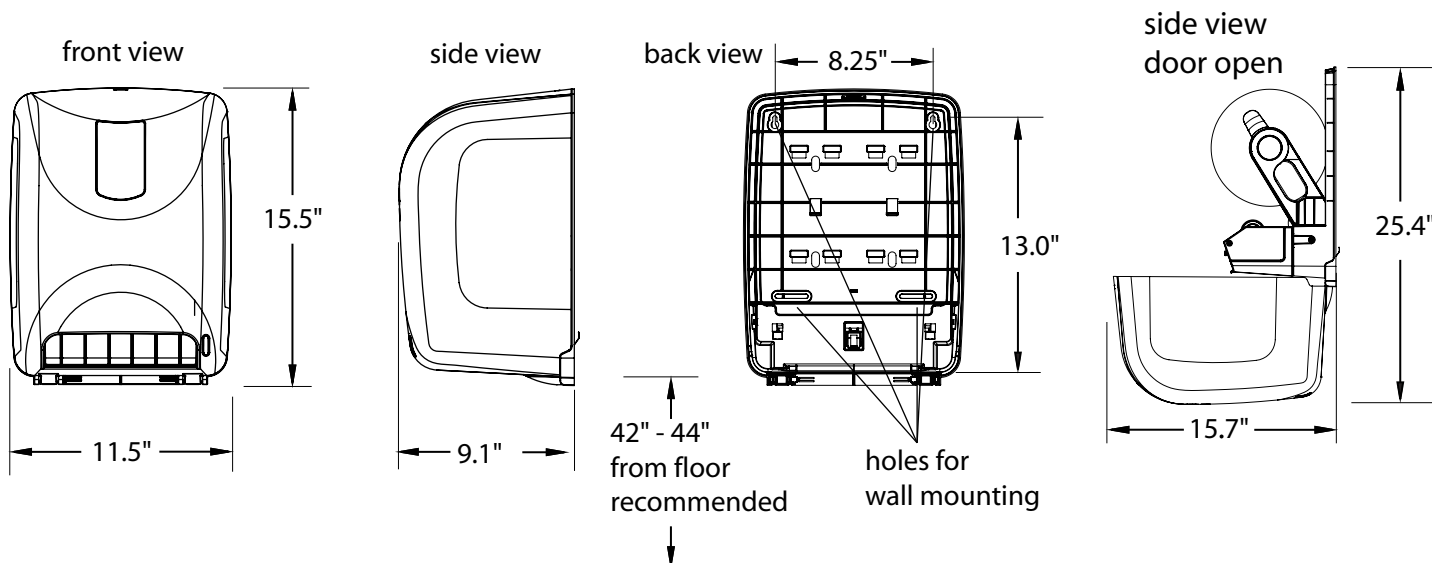

OPERATION

The dispenser runs on three D-cell alkaline batteries (included) and has a low battery indicator light.

The dispenser operates in hanging towel mode, where a new towel is dispensed after the current towel is removed from the dispenser.

This dispenser includes a stub roll holder that will allow a new roll to be placed in the dispenser once the primary roll is less than three (3) inches in diameter. Both rolls will dispense until the stub roll is exhausted.

SPECIFICATIONS

The cover and back housing are constructed of high-strength, low maintenance polymer materials.

INSTALLATION

Position the dispenser so there is room to access the lock and open the cover. Allow a minimum 10 inches below the dispenser and 2 inches on each side. Using the dispenser as a template, mark the holes on the wall. Drill holes for appropriate wall anchors and four (4) screws (anchors and screws not included). Tighten screws to attach the dispenser to the wall. Use caution to prevent deformation of the rear housing as this may impede the performance of the dispenser. Use only the mounting holes provided in the rear housing. This dispenser can also be mounted using two (2) Georgia-Pacific SKU# 54019 mounting brackets (sold separately).

WEIGHT

4.5 lbs
(without batteries or paper installed)

DIMENSIONS

10.5"H x 12.8"W x 6.5"D

PAPER

SKU# 26910, 1000' - White
SKU# 26920, 1000' - Brown

The installation description and illustration herein are to serve as a guide. Georgia-Pacific reserves the right and does from time to time make changes and improvements in design, dimensions and subsequent installation instructions. Georgia-Pacific does not take responsibility for any damage, or injury to persons or property or any other incidental or consequential losses due to these installation instructions.

For questions or comments, please call
1-866-HELLO GP (435-5647)